

## Chapter 5-3

### SWR

The most common and frequent test amateurs perform with equipment shown in Photo 1, is the Voltage Standing Wave Ratio (VSWR) measurement on their antennas. In many instances, the V is dropped, and the term becomes the SWR.

The SWR value is expressed as figures such as 2:1, 5:1, etc. This is a numerical ratio and has no units. When there is a perfect impedance match between the transmitter and the load, the SWR will be 1:1. But when there is a complete mismatch with a short or open circuit, the SWR value is  $\infty:1$ .



Photo 1 - Various VSWR meters.

We all do it. We all accept it. But do we really know what we are doing? Hopefully this article will shed some light on the wave that should be a ripple.

### Impedance Matching

When connecting an antenna to a radio (transmitter or receiver) there are three components, and their associated connections, to be considered in the match.

1. Transmitter (and receiver)
2. Transmission Line
3. Antenna

To achieve maximum power transfer from the transmitter to the airwaves, the output impedance of the transmitter must match the input impedance of the transmission line, and the output of the transmission line must match the input impedance of the antenna.

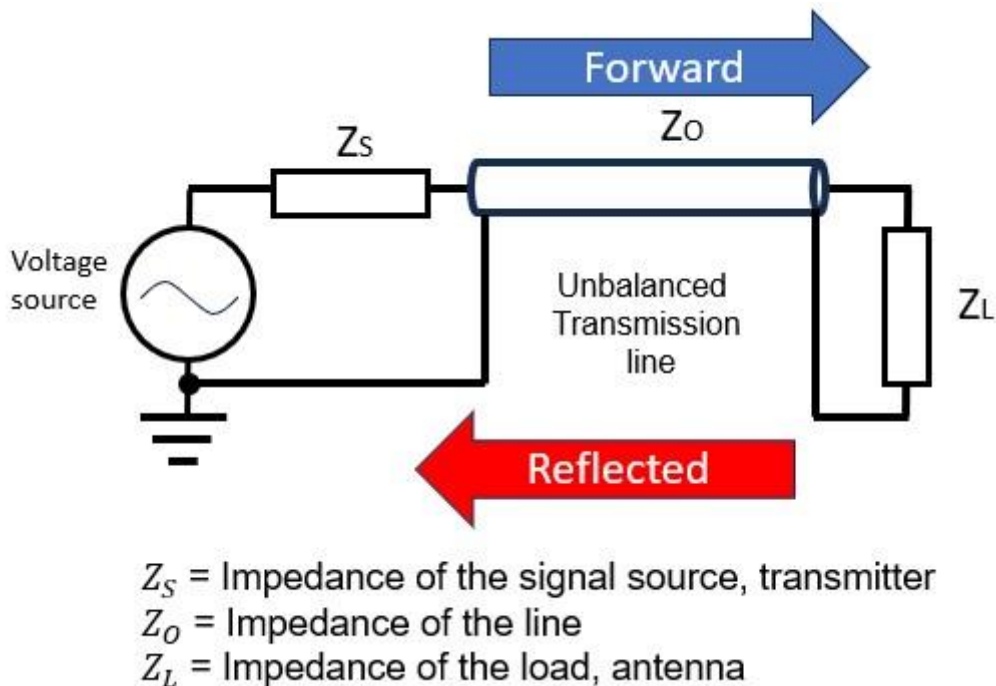


Figure 1 - Unbalanced transmission line.

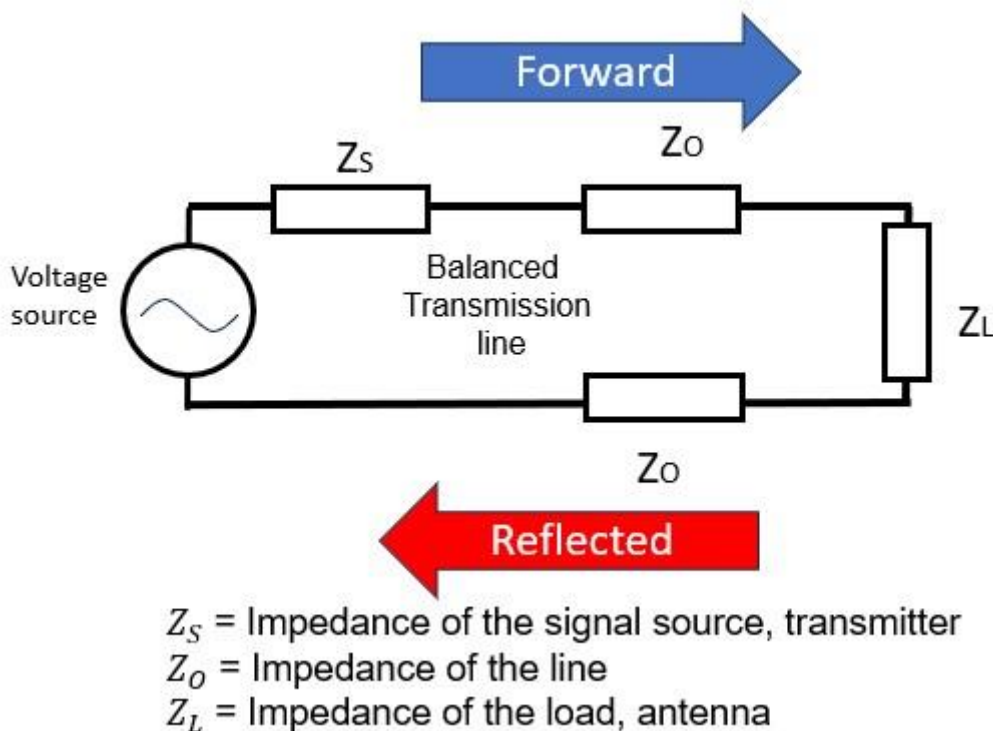


Figure 2 - Balanced transmission line.

Looking at Figures 1 and 2, if  $Z_S = Z_O = Z_L$ , a matched condition exists. Attach an oscilloscope to the antenna emitting a simple carrier wave, the signal on the oscilloscope would be a perfect carrier sine wave. All the power is transmitted to the antenna.

Any mismatches, and a portion of the signal from the transmitter is reflected to the transmitter. Just like an echo in a bare room. If this reflection is a wave, this is not good. A ripple is ok. The comparison of this reflected wave is called the SWR.

An antenna is a complex load with resistance and reactance. For this article, I am only addressing antennas as  $Z_L$  for simplicity.

## SWR

The definition for SWR I found is shown below.

*“SWR is a measure of impedance matching of loads to the characteristic impedance of a transmission line. Impedance mismatches result in standing waves along the transmission line, and SWR is defined as the ratio of the partial standing wave's amplitude at an antinode (maximum) to the amplitude at a node (minimum) along the line.”*

That is a mouthful. Simply, it means measure the high, measure the low, and compare.

SWR meters are passive instruments that measure forward and reflected voltage, and in addition to the SWR scale often include a power scale in Watts.

## Impact

The reason a wave is not good is that as the reflected wave from any mismatch adds and subtracts to the forward wave, producing a standing wave. The forward and reflected waves are moving up and down along the transmission line. As the waves come into phase, the voltages add, and at that point are the maximum (antinode). As the waves go out of phase, the voltages subtract, and are at the minimum (node).

Figure 3 gives an indication of how the waves moving in and out of phase can become so large. For example, a SWR of 1.2:1 means the peak voltage is 1.2 times the minimum voltage along that line.

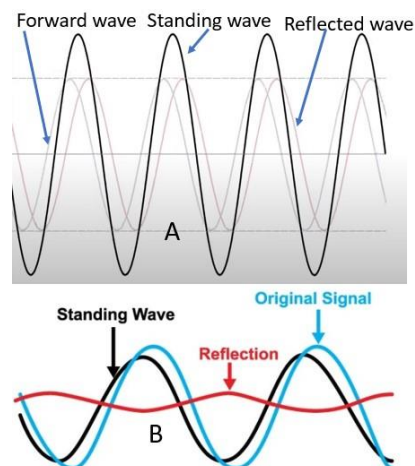


Figure 3 – Examples of a standing waves.

The wave in Figure 3A is an example of an open or short circuit mismatch. The forward and the reflected waves are at the same amplitude. Figure 3B is an example of a more moderate mismatch.

## Consequences

Some negative side effects of a high SWR include:

- Transmitter power amplifiers can be damaged.
- PA Protection in modern transmitters reduces output power.
- High voltage and current levels can damage the transmission lines.
- Delays caused by reflections can cause distortion in the signal.
- Reduction in signal strength compared to perfectly match system.

## Limits

- SWR 1.0-1.5      Ideal.
- SWR 1.5 - 1.9      There's room for improvement.
- SWR 2.0 - 2.4      Should not damage your radio with casual use.
- SWR 2.5 - 2.9      Performance decreased.
- SWR 3.0+          Could cause damage with degraded performance.

## Percentages

The table below demonstrates the percentages of power and voltage reflected to the transmitter from a mismatched SWR.

VSWR	Voltage	Power
	Refected %	Reflected %
1.0 : 1	0	0
1.1 : 1	5	0.2
1.2 : 1	9	0.8
1.3 : 1	13	1.7
1.4 : 1	17	2.8
1.5 : 1	20	4
1.6 : 1	23	5.3
1.7 : 1	26	6.7
1.8 : 1	29	8.2
1.9 : 1	31	9.6
2.0 : 1	33	11
2.5 : 1	43	18.4
3.0 : 1	50	25
4.0 : 1	56	36
5.0 : 1	67	44.4
10.0 : 1	82	67

## ATU

An antenna tuner, also known as antenna matching unit, impedance matching unit, matchbox, matching network, transmatch, antenna match, antenna tuning unit (ATU), antenna coupler, or feedline coupler. The ATU is a passive electronic device placed in between the radio transmitter and the transmission line. The ATU does not change the transmission line or the antenna impedance. The ATU only provides the transmitter with the correct matching impedance. The photo below shows the inside of an ATU.




## Dummy Load

A good dummy load is an essential piece of equipment in the shack. The dummy load not only dissipates the signal energy when tuning the transmitter, it is a perfect impedance match to substitute as a transmission or antenna load. Getting a high SWR and not sure where the mismatch is? Substitute the dummy load for the sections in the transmission line or antenna.

## Measuring SWR

The SWR meter is placed in circuit after the transmitter and before the ATU. See figure below.

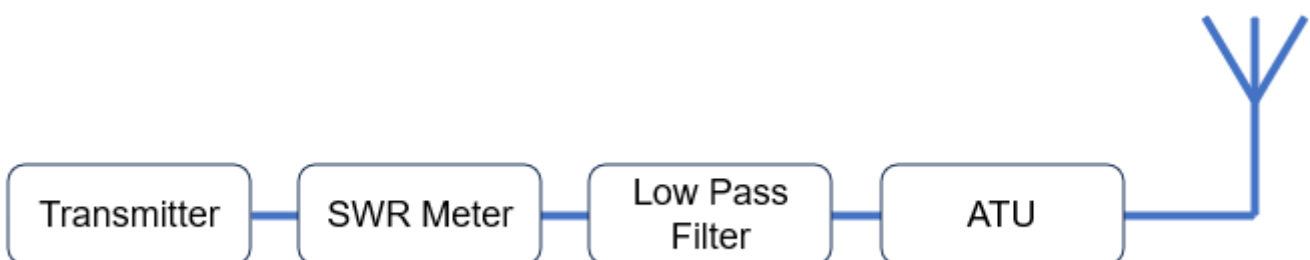

- Adjust the transmitter to the required frequency and switch to low power.
- Listen on the frequency.
- If the frequency is clear, announce your call sign and say you are testing.
- Listen on the frequency.
- Transmit a steady signal with CW or FM.
- Calibrate the SWR meter in accordance with the SWR meter instructions.

- Switch the meter to SW test and retransmit.
- Read the SWR meter.

When an antenna is not of the proper length, the source will see something other than the pure resistance, at the resonant point.

- If the SWR is better at higher frequencies, the antenna is too short and capacitive reactance is present. Lengthen the antenna.
- If the SWR is better at lower frequencies, the antenna is too long and inductive reactance will be present. Shorten the antenna.

### Regular Checks

Mismatches can occur with components of different impedances or a faulty connector. I had an active antenna in use for some time. After a holiday I checked the SWR, and the reading was very high. Water had penetrated the connector and caused corrosion. So, check your VSWR regularly. Taught me a lesson to always have my SWR meter permanently in the equation.

### Further Reading

The examples used often refer to the transmitter. SWR effects receivers equally in terms of transmission line degradation and consequential receiver performance. Information about related factors such as increased losses in coaxial cable due to high SWR, and how such losses can be mitigated with Open Wire Feeder, is available in respected antenna publications by John D Kraus W8JK, William I Orr W6SAI, ARRL, RSGB, et al.

---

Go to Chapter 5-3 Questions.

*Have fun and stay safe.*